


INSTALLATION INSTRUCTIONS

Product**7160-0580, 7170-0565****Revision**

Rev.D

Form

INST-657

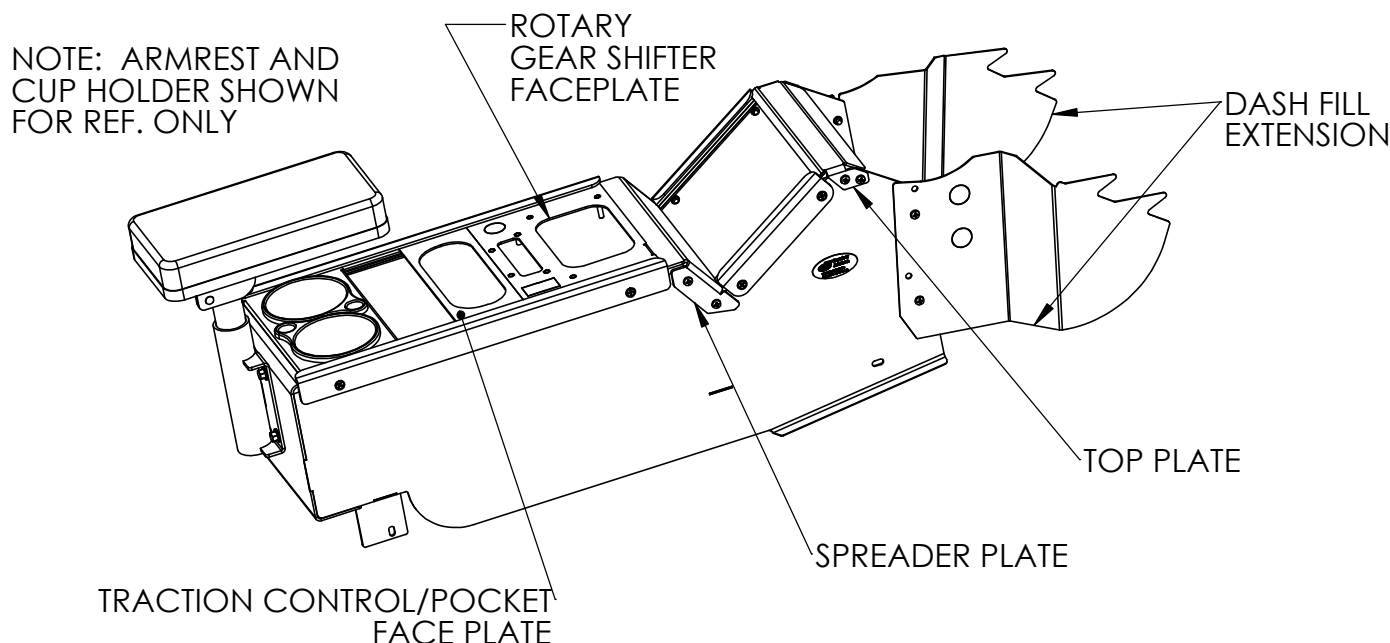Description: DODGE DURANGO CONSOLE 2014+**Printing Spec:PS-001****Vehicle Disassembly**

1. Begin by disassembling vehicle OEM console.
2. Set vehicle parking brake and disconnect vehicle battery.
3. Gently pull up at storage bin/low range switch (behind shifter) to remove console top (Fig 1).
4. Disconnect all harness for the console top.
5. Pop the storage bin or low range switch out of console top.
6. Pull to remove side trim pieces from console (Fig 2).
7. Remove two bolts at the front of the console (Socket M10)
8. Remove the shifter assembly from console
9. Unplug the main harness from the 12v accessory jacks. Pull out Christmas tree fasteners so harness can be laid in passenger foot well (Fig 5).
10. Remove two screws at the front of the console sub structure (Fig 3).
11. Slide seats all the way forward. From the back seats, pop out rear bolt covers on the side of the console and remove bolts (Socket M10) (Fig 4).
12. Remove console sub structure from vehicle.
13. **Recommended:** Stuff something (clean rag) or use foil tape to close HVAC vent tube under the front of the dash to protect the electronics from excess heat in cold weather.

Product Mounting Disclaimer

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

© copyright 2011 Gamber-Johnson, LLC

If you need assistance or have questions, call Gamber-Johnson at 1-800-456-6868

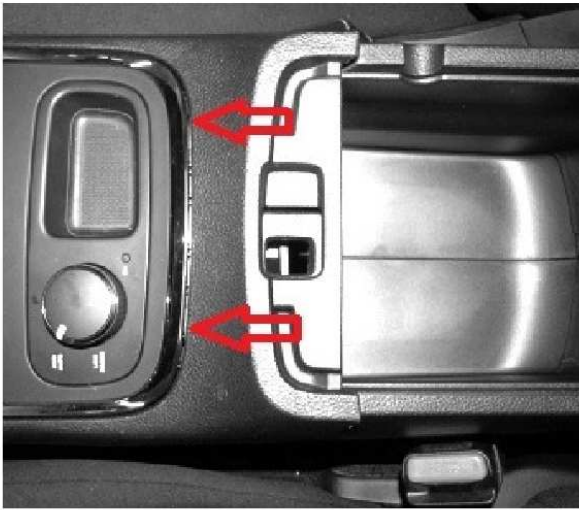


Fig 1 - Pry Up Console Top

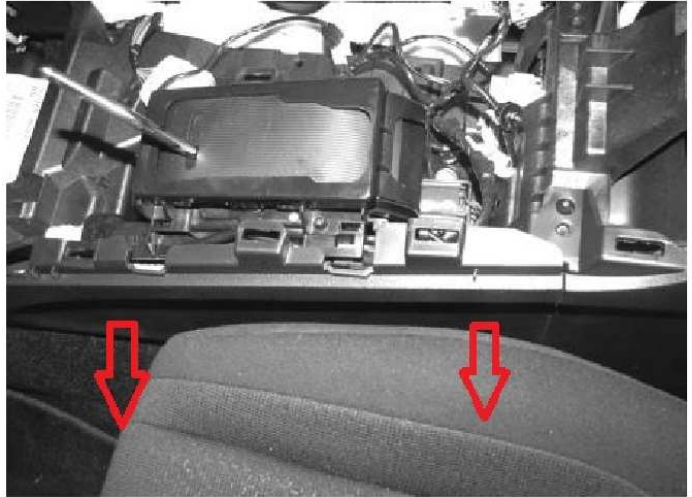


Fig 2 - Side Trim Pieces



Fig 3 - Front Sub Structure Screws



Fig 4 - Rear Mounting Bolts

Console installation

1. Unpack console and remove Top Plate, Spreader Plate and faceplates.
2. Slide console partially into vehicle.
3. Install Rotary Gear shifter and the USB/AUX/SD Card module into the faceplate using hardware provided. (Fig 7 & 8). Place this assembly in the console.
3. Loosely bolt console box into vehicle using OEM hardware at front and rear of box.
4. Reinstall Spreader Plate and Top Plate.
5. Tighten console box mounting hardware.
6. Route main harness through box and plug in shifter interlock harness.
7. Install storage bin/low range switch into cutout in Shifter Gate Plate.
8. Using needle nose pliers, carefully pry out the spring clips on the storage bin/low range switch to secure it into the Shifter Gate Plate (Fig 6).
9. Install Shifter Gate Plate into console by applying a proper length of the provided Dual Lock™ reclosable fastener to the back side of the plate and pressing into place at front of console.
10. Install Dash Fill Extensions using the provided hardware.
11. Reconnect vehicle power and verify if Shifter works or not.

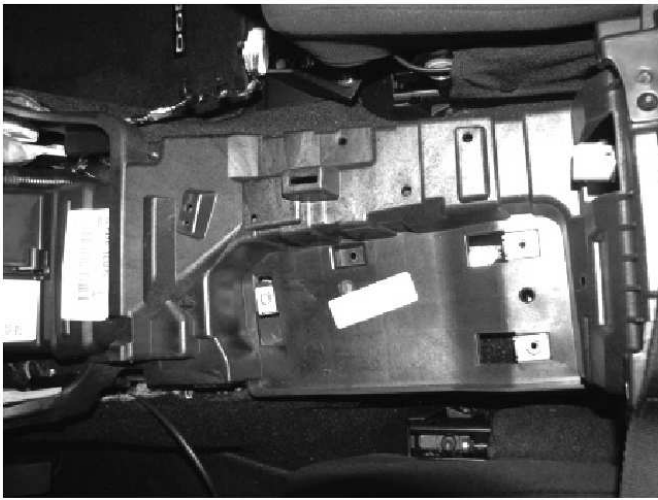


Fig 5 - Harness and Shifter Removed

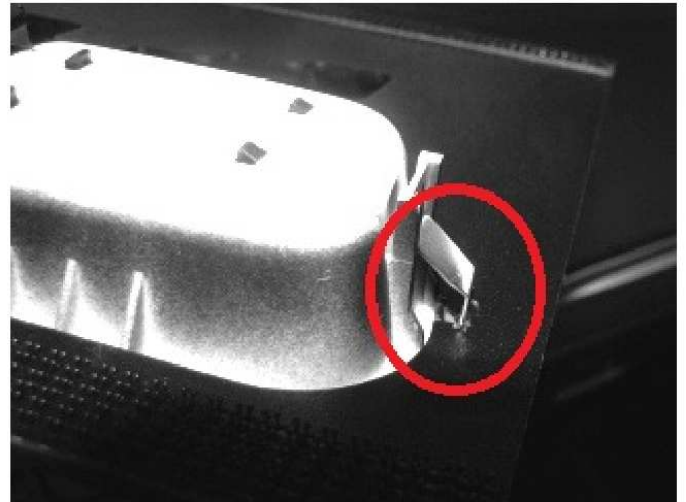


Fig 6 - Low Range Spring Clips

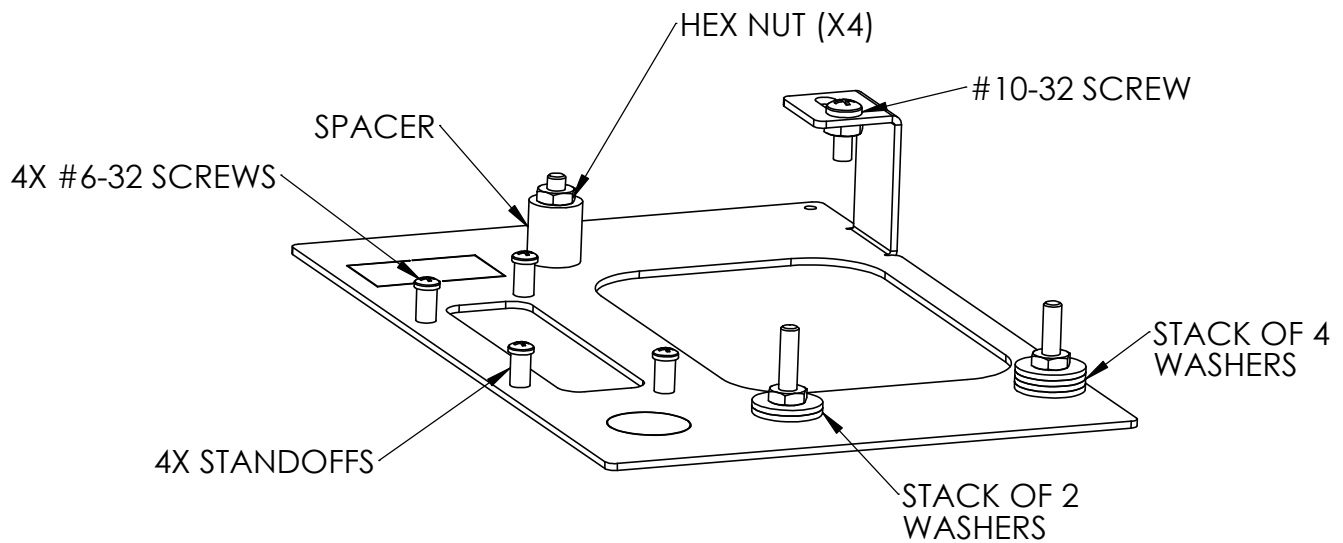


Fig 7 - Rotary Gear Shifter Faceplate with Hardware



Fig 8 - Rotary Gear Shifter and USB/AUX/SD Card Module in Faceplate